


7.8 PERFORMANCE SPECIFICATIONS

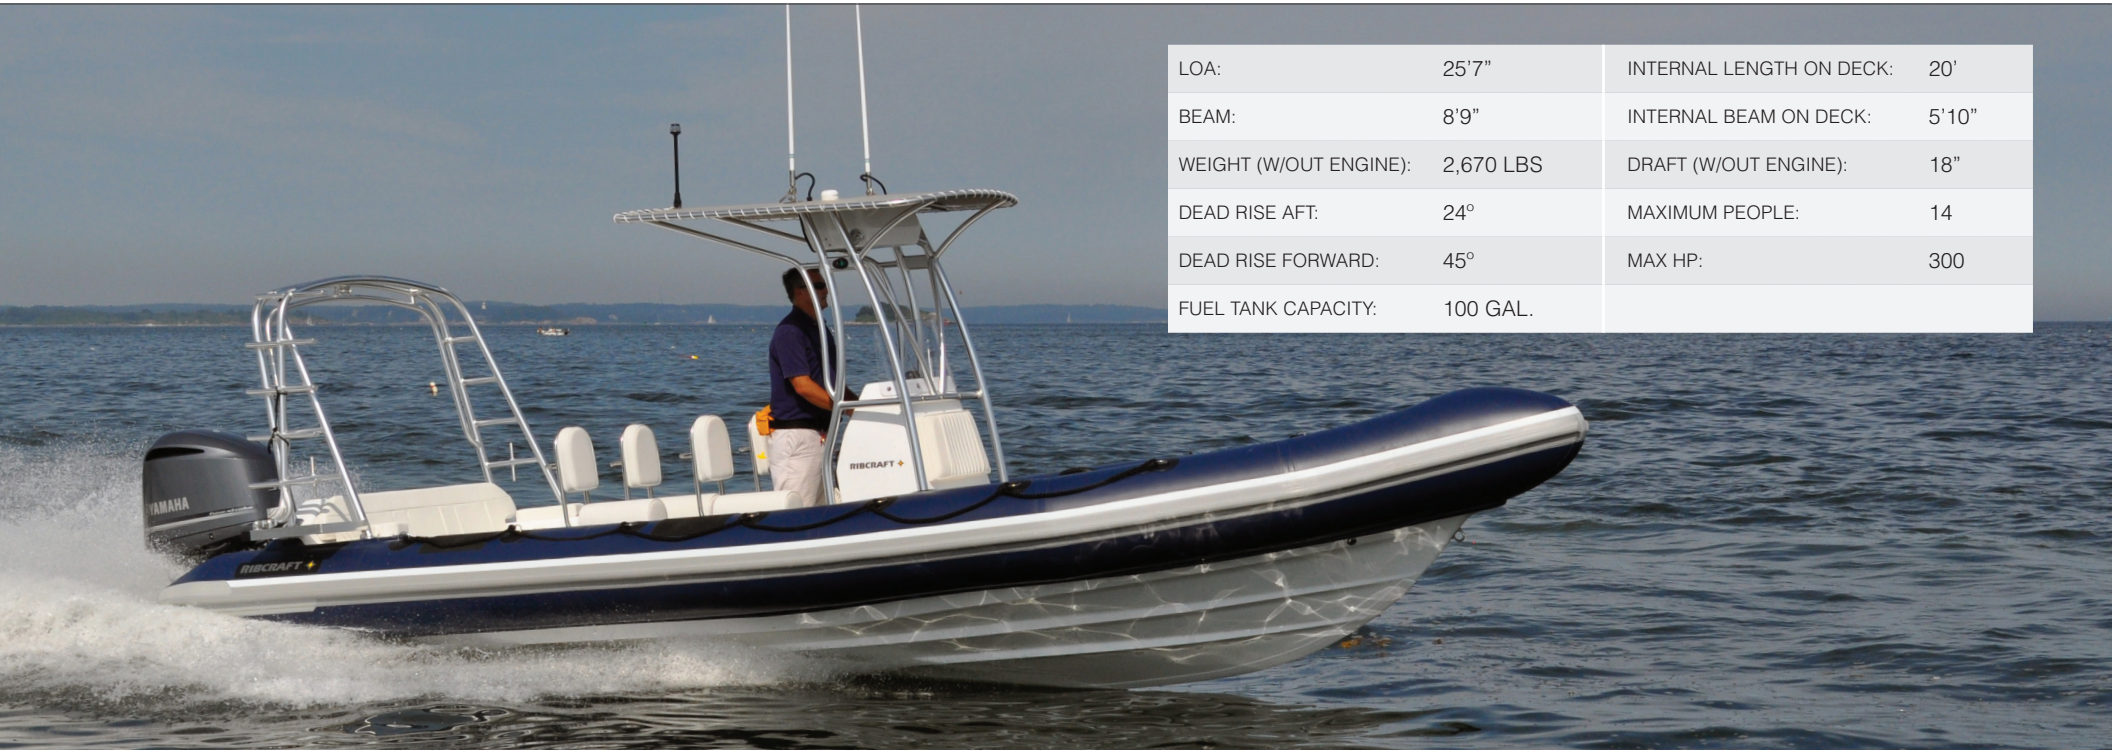

LOA:	25'7"	INTERNAL LENGTH ON DECK:	20'
BEAM:	8'9"	INTERNAL BEAM ON DECK:	5'10"
WEIGHT (W/OUT ENGINE):	2,670 LBS	DRAFT (W/OUT ENGINE):	18"
DEAD RISE AFT:	24°	MAXIMUM PEOPLE:	14
DEAD RISE FORWARD:	45°	MAX HP:	300
FUEL TANK CAPACITY:	100 GAL.		

Engine Comparison	HP	Engines	Propeller	Top Speed (MPH)	Top RPM
Honda	225	1	Aluminum	43	5500
Yamaha	225	1	Aluminum	44	5900
Yamaha	250	1	Stainless Steel	46	5600
Evrindue	250	1	Aluminum	47	5200
Yamaha	300	1	Stainless Steel	54	5600
Yamaha	150	2	Stainless Steel	56	5900
Honda	150	2	Aluminum	50	5800

The information and data contained in this performance bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. You boat's performance may be different than the information contained in this bulletin due to various factors including your boat's actual weight, configuration, wind and water conditions, temperatures, humidity, elevations, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. RIBCRAFT reserves the right to change the specifications and performance data of this bulletin or model without notice.