


4.8 PERFORMANCE SPECIFICATIONS

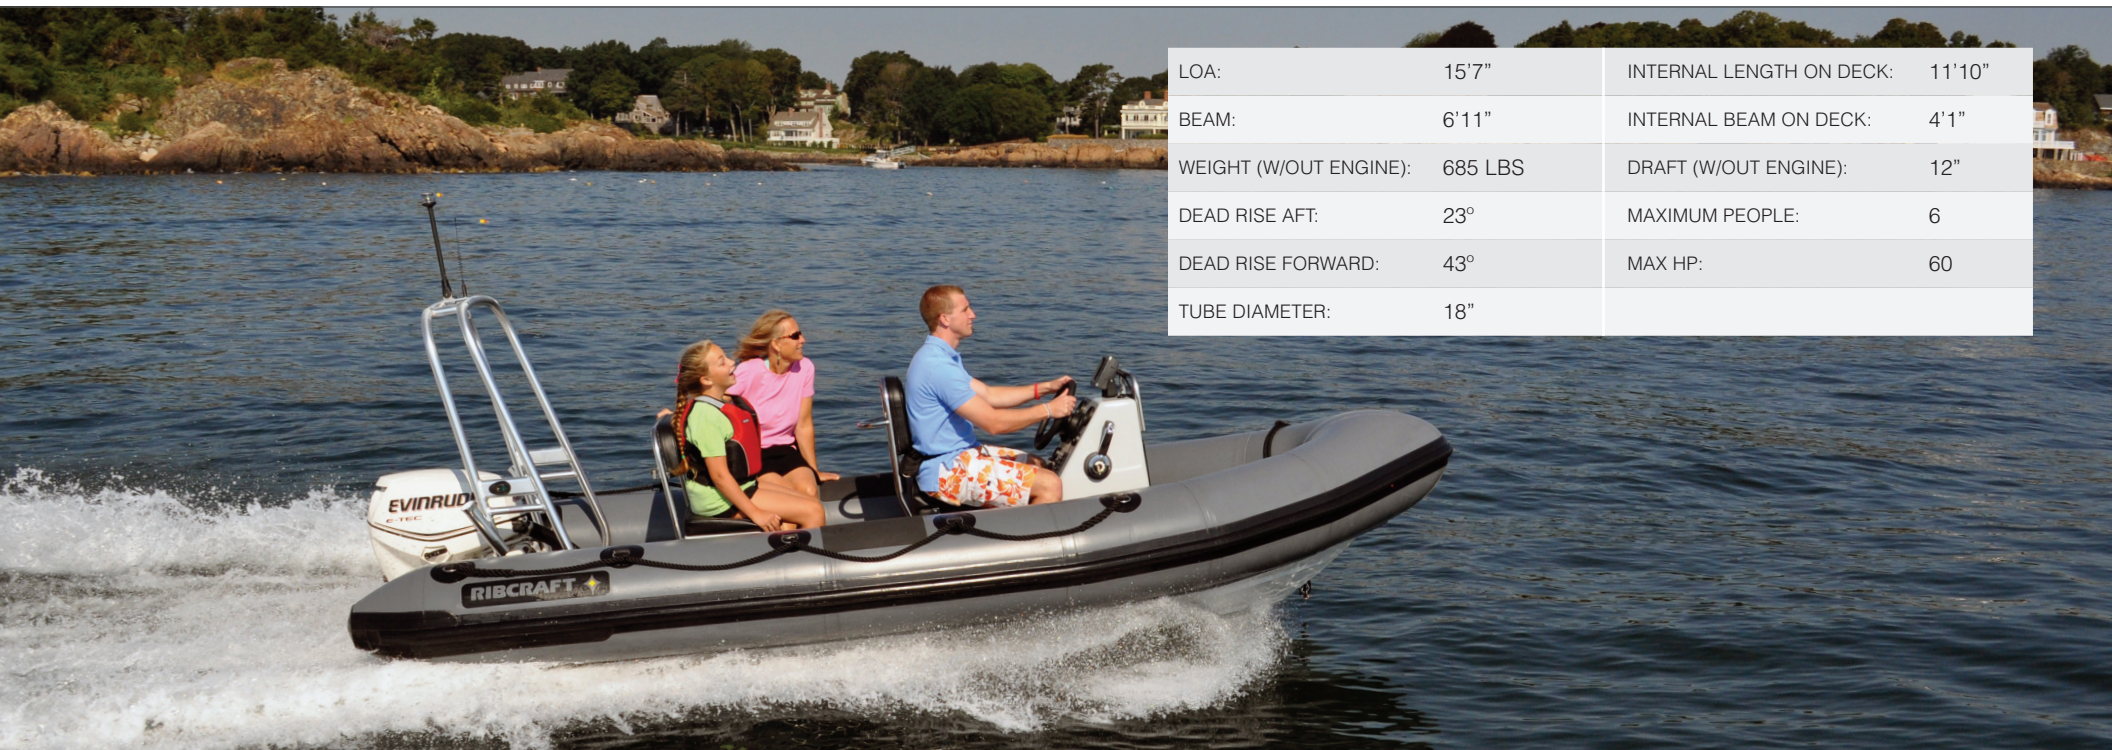

LOA:	15'7"	INTERNAL LENGTH ON DECK:	11'10"
BEAM:	6'11"	INTERNAL BEAM ON DECK:	4'1"
WEIGHT (W/OUT ENGINE):	685 LBS	DRAFT (W/OUT ENGINE):	12"
DEAD RISE AFT:	23°	MAXIMUM PEOPLE:	6
DEAD RISE FORWARD:	43°	MAX HP:	60
TUBE DIAMETER:	18"		

Engine Comparison	HP	Engines	Propeller	Top Speed (MPH)	Top RPM
Honda	40	1	Aluminum	25	5800
Yamaha	40	1	Aluminum	28	5900
Honda	50	1	Aluminum	30	6000
Mercury	60	1	Stainless	38	5900
Evinrude	60	1	Aluminum	33	5800

The information and data contained in this performance bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. You boat's performance may be different than the information contained in this bulletin due to various factors including your boat's actual weight, configuration, wind and water conditions, temperatures, humidity, elevations, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. RIBCRAFT reserves the right to change the specifications and performance data of this bulletin or model without notice.